





INSTALLATION INSTRUCTIONS

412N & 422 MOMENTARY SPDT PUSH SWITCH

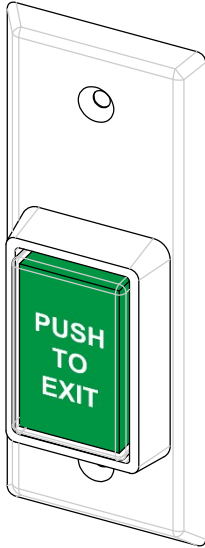

412N

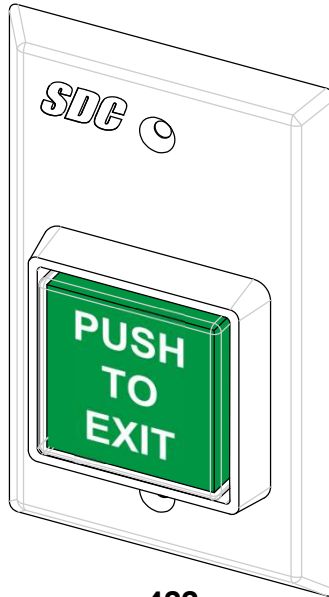

422




422A

Features


- Large illuminated momentary push buttons
- Mounted on a durable stainless steel plate
- 422A complies with ADA requirements
- Optional faceplate mounted LEDs to provide additional visual status indicators
- Interchangeable signs (Red or Green)

Specifications


Switch Type:	SPDT (Form C)
Switch Contact Rating:	5A@30VDC (Resistive)
Assembly Dimensions	422 & 422A 4-5/8" x 2-7/8" x 1-3/4"
	412N 4-1/2" x 1-3/4" x 1-3/4"

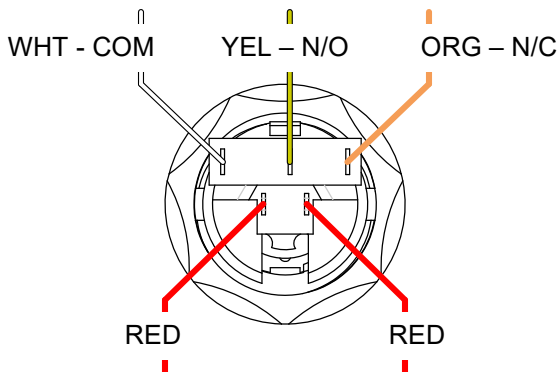

Switch Wiring

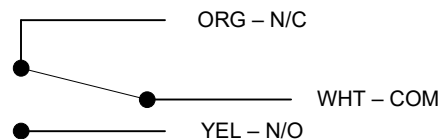


Lamp Wiring

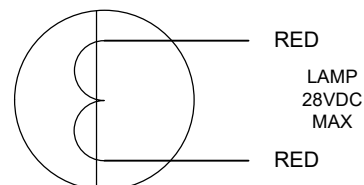

OPTIONAL FACEPLATE LED STATUS WIRING

Single Color LED Wiring (L1G, L1R, or L2)



Tri-Color LED Wiring (LT)



- Apply (+) VDC to RED wire to illuminate RED
- Apply (+) VDC to GRN wire to illuminate GREEN
- Apply (+) VDC to both GRN & RED wire to illuminate AMBER

CHANGING DISPLAY SIGN

To change the display sign, the clear lens must first be removed. Use a utility knife or similar blade to gently pry up the lens with a twisting motion as shown below. To replace the lens, press it into the switch until it snaps in place.

