
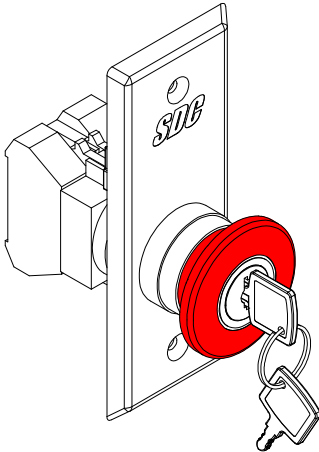
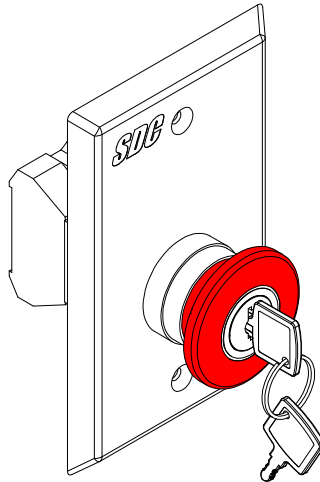


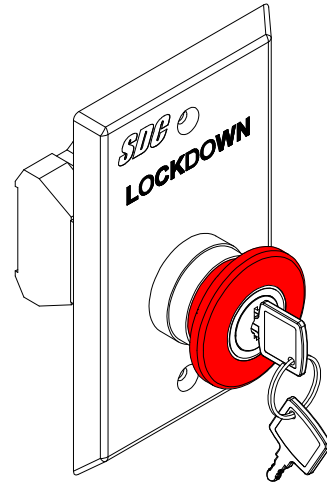

INSTALLATION INSTRUCTIONS

432KN, 432K, & 432KLD MOMENTARY LATCHING W/KEY RESET


**432KN****432K****432KLD**

Operation


Push mushroom button to activate & latch.
Insert key & turn clockwise to reset.

Overall Dimension: 3-1/4"
(De-Activated, Less Key)

DPST

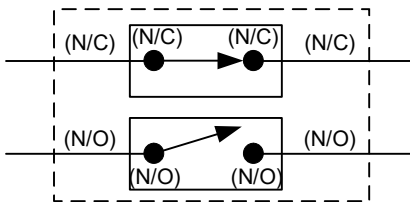

Side View

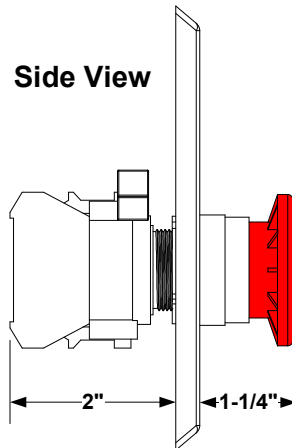

Specification

Switch Type :	DPST (1 N/C & 1 N/O)
Contact Rating :	24VDC @ 3A (Resistive/Inductive)
Wire Size :	12~22AWG (Single)
Assembly Dimensions	432K 4-5/8" x 2-7/8" x 2"
	432KN 4-1/2" x 1-3/4" x 2"

UL 294 Performance Rating - (Only 432KLD)




Level I :	Line Security
Level I :	Destructive Attack
Level I :	Standby Power
Level IV :	Endurance

All peripheral modules for UL compliance are required to be UL Listed UL 294.


To be used with a Class 2 power supply or voltage compatible UL 294 or UL 603 listed power supply

Compliance with ANSI/NFPA 70 National Electrical Code

Optional Single Color LED Wiring (L1G, L1R, or L2)



Optional Tri-Color LED Wiring (LT)



- Apply (+) VDC to RED wire to illuminate RED
- Apply (+) VDC to GRN wire to illuminate GREEN
- Apply (+) VDC to both GRN & RED wire to illuminate AMBER

Any suggestions or comments to this instruction or product are welcome. Please contact us through our website or email engineer@sdsecurity.com