



INSTALLATION INSTRUCTIONS

527 & 527-2 MONITORING SWITCH KIT SARGENT 8800 AND ARROW S1250 SERIES


Specifications

Switch Type: SPDT (Form C)
Switch Contact Rating: 5A @ 30VDC (Resistive)

Wiring

White = COM
Yellow = N/O
Orange = N/C

- A. REMOVE ACCESS COVER FROM PUSH BAR.
- B. ATTACH SWITCH(ES) TO SWITCH PLATE AS SHOWN USING SUPPLIED SCREWS.
- C. SLIDE SWITCH ASSEMBLY INTO OPEN END OF ACCESS COVER ALL THE WAY THROUGH TO THE OTHER END.
- D. INSERT AND TIGHTEN PHILLIPS PAN HEAD SCREW LOCKING THE SWITCH ASSEMBLY IN PLACE.
- E. SLIDE ACCESS COVER WITH SWITCH ASSEMBLY BACK INTO PUSH BAR.

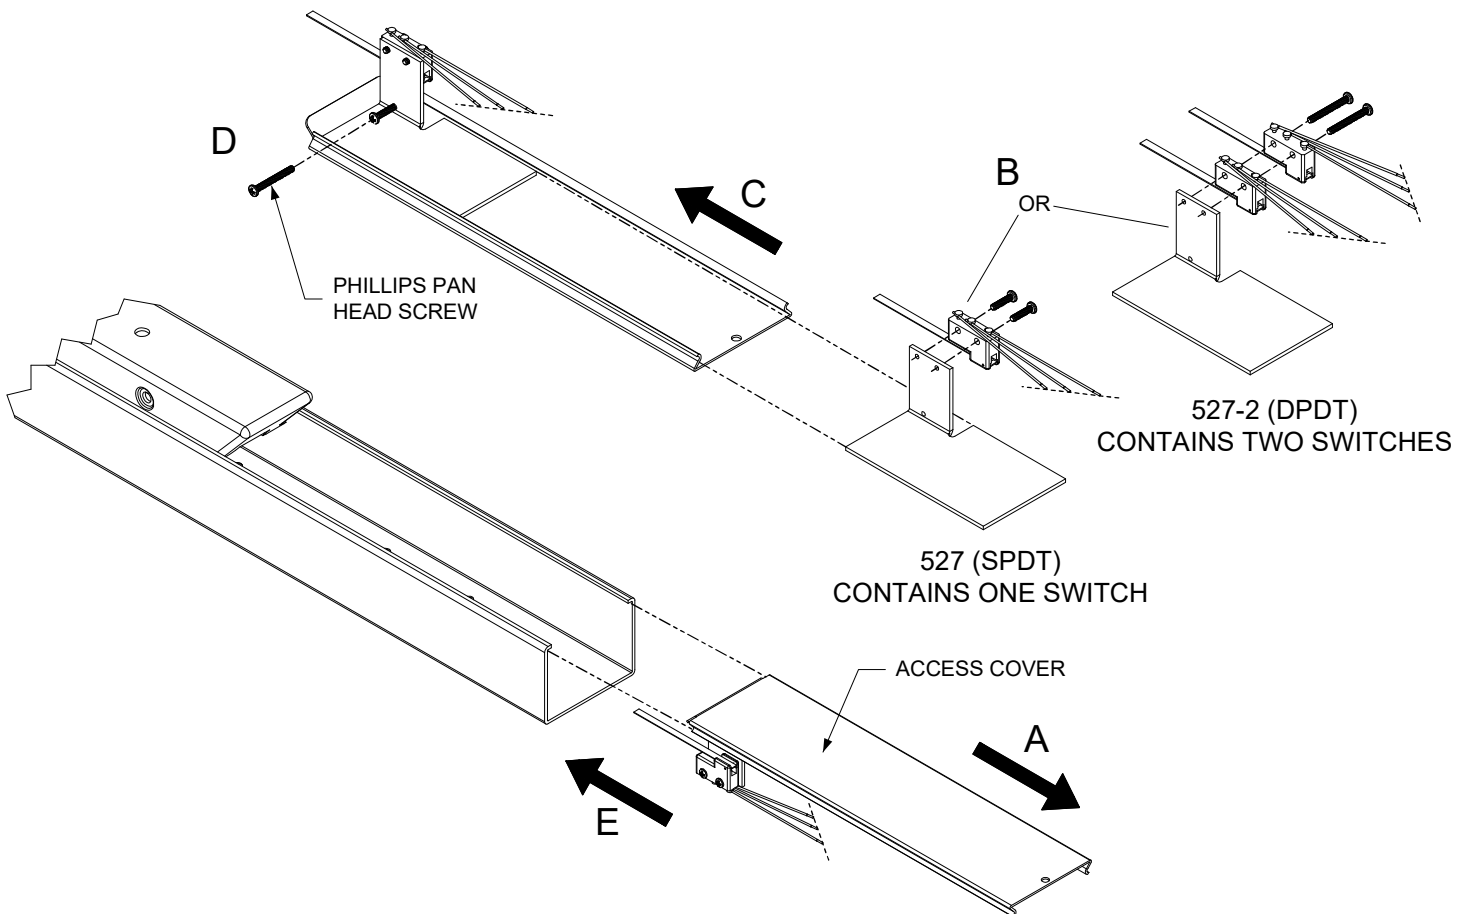

Any suggestions or comments to this instruction or product are welcome. Please contact us through our website or email engineer@sdsecurity.com